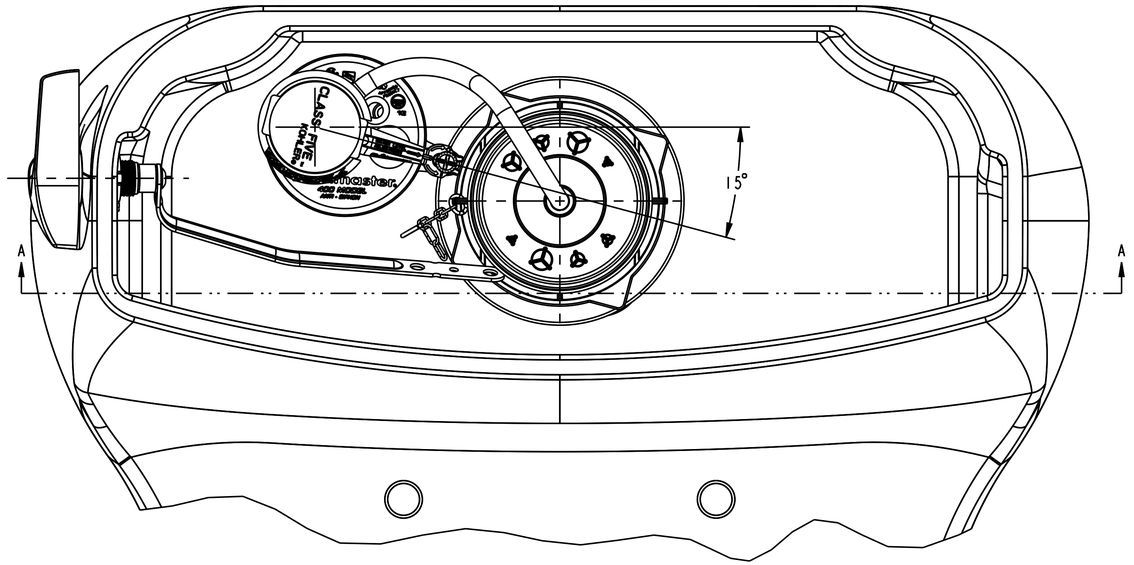

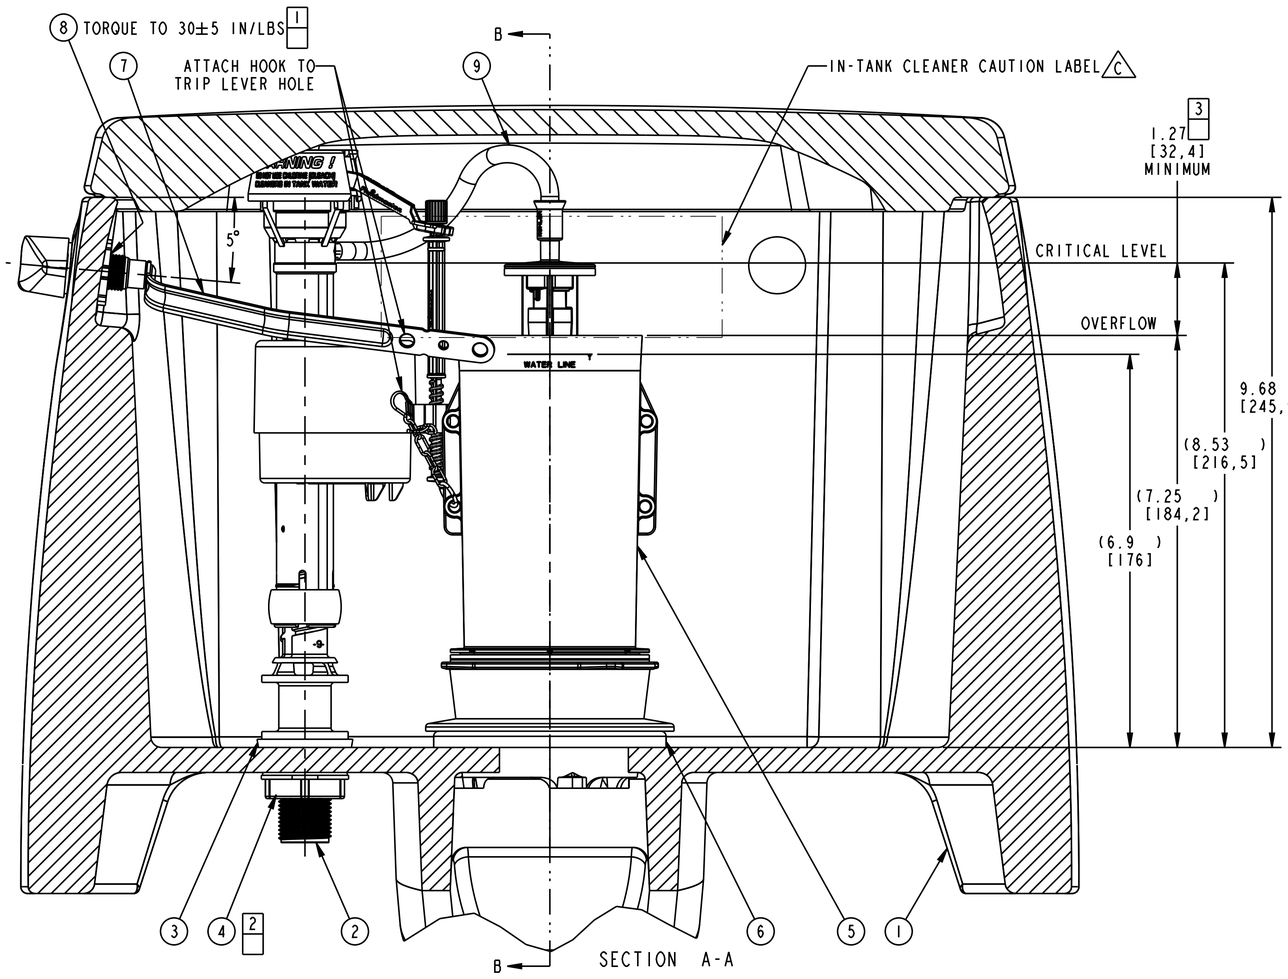

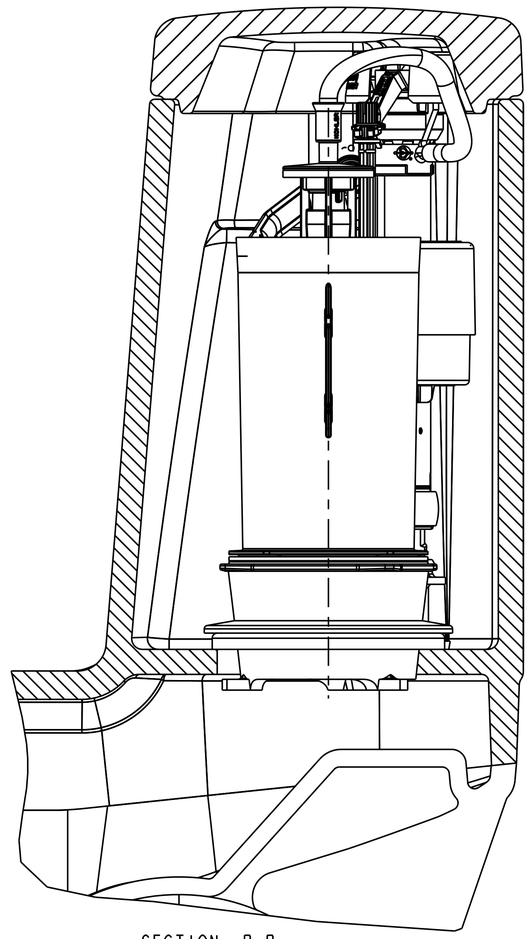

SECTION B-B

APPLICATION STANDARDS:

A. H020.001 TOILET FLUSH TEST PERFORMANCE

B. H020.001.2.01 FILL VALVE TIGHTENING

C. H020.001.2 LABEL

NOTES:

1. N THERE ARE 3 CRITICAL CHARACTERISTIC SYMBOLS ON THIS DRAWING.
2. LABEL REFERENCED IN H020.001.2 IS TO BE AFFIXED TO THE INSIDE BACKWALL - FLUSH WITH THE TOP EDGE. IT SHOULD BE LOCATED TO BE VISIBLE AND NOT CONCEAL THE STAMPED CASTERS INFORMATION.

ALL DIMENSIONS IN: INCHES				
1	-	SMB	SEE PCI #P1005056	06.03.10
SHT	SYM	BY	DESCRIPTION	DATE

DWG REVISION RECORD

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

TOLERANCES UNLESS OTHERWISE SPECIFIED
.XXX ± 0.001
.XX ± 0.01
.X ± 0.1
ANG ± 0.5

THIS DRAWING IN DESIGN AND DETAILS IS THE PROPERTY OF KOHLER CO. AND MAY NOT BE USED EXCEPT IN CONNECTION WITH KOHLER CO. WORK. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

APPROVED	DATE	PLOT DATE	SCALE
D. BOGARD	06.02.10		0.750
DRAWN	DATE	CHECKED	DATE
SMB	06.02.10	-	-

DWG SIZE: D

DO NOT SCALE DRAWING — PRO/E

KOHLER
KOHLER CO. KOHLER, WISCONSIN 53044

THIRD ANGLE PROJECTION

DESCRIPTION: ASSEMBLY DETAIL, TOILET

ASSEM NAME: 1153108

DWG. NO. 1153108

SHT 1 of 1